

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.

Battery Construction




Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

Dimensions and Weight

Length(mm / inch)	350 / 13.78
Width(mm / inch)	167 / 6.57
Height(mm / inch)	179 / 7.05
Total Height(mm / inch)	183 / 7.20
Approx. Weight(Kg / lbs)	22.2 / 48.9

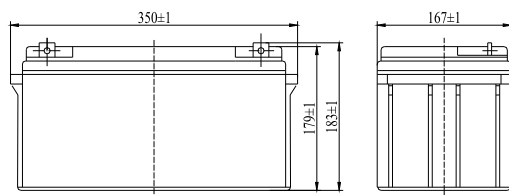

Performance Characteristics

Nominal Voltage	12V
Number of cell	6
Design Life	10 years
Nominal Capacity 77°F(25°C)	
20 hour rate (3.25A, 10.5V)	65Ah
10 hour rate (6.1A, 10.5V)	61Ah
5 hour rate (10.9A, 10.5V)	54.5Ah
1 hour rate (44.2A, 9.6V)	44.2Ah
Internal Resistance	
Fully Charged battery 77°F(25°C)	6mOhms
Self-Discharge	
3% of capacity declined per month at 20°C(average)	
Operating Temperature Range	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
Max. Discharge Current 77°F(25°C)	650A(5s)
Short Circuit Current	1700A
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	14.4-14.7V
Maximum charging current	19.5A
Temperature compensation	-30mV/°C
Standby use	13.6-13.8V
Temperature compensation	-20mV/°C

Discharge Constant Current (Amperes at 77°F25°C)

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	215	160	125	70.5	44.2	17.2	11.6	6.47	3.37
1.65V	203	154	120	68.4	43.1	16.8	11.3	6.37	3.34
1.70V	191	143	114	66.3	42.0	16.4	11.1	6.24	3.30
1.75V	178	132	108	64.1	40.9	16.0	10.9	6.10	3.25
1.80V	165	120	100	61.8	40.0	15.7	10.7	6.00	3.20

Discharge Constant Power (Watts at 77°F25°C)

End Point Volts/Cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	381	282	204	122	98.0	80.8	48.7	34.5	22.8
1.65V	359	267	200	120	96.5	79.0	47.7	33.8	22.6
1.70V	337	252	197	118	94.5	77.2	46.7	33.1	22.1
1.75V	315	237	193	116	92.4	75.4	45.6	32.4	21.9
1.80V	303	220	183	114	90.0	75.5	44.4	31.7	21.7

